



## Prestressed Concrete Post Tension Round Head Anchorage

Our Product Introduction

for more products please visit us on [greycastironcasting.com](http://greycastironcasting.com)

### Basic Information

- Place of Origin: China
- Brand Name: NC8712
- Certification: ISO9001,CE,SGS
- Model Number: 8712
- Minimum Order Quantity: 100 pcs
- Price: Can talk
- Packaging Details: Wooden Case
- Delivery Time: 30 days
- Payment Terms: T/T, D/A, L/C
- Supply Ability: 60,000 pcs monthly




### Product Specification

- Material: Alloy Steel
- Diameter: 12.7 Mm, 15.24mm
- Capacity: 1860Mpa
- Application: Concrete, Building
- Thread Size: M6
- Fastener Type: Wedge Anchors



### More Images

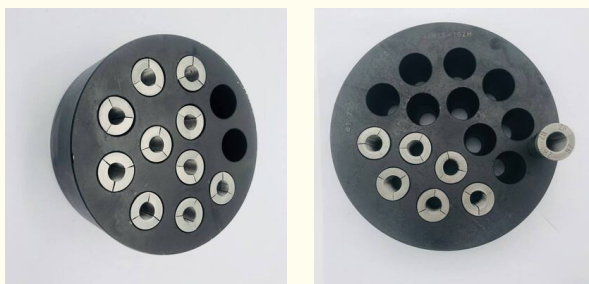

## Product Description

### Prestressed Multi Strand Group Anchor 1860Mpa Head Suitable 12.7mm

#### Product Details

Prestressed Concrete Post Tension Round Head Anchorage for PC strand can be use for a wide range , the design of the wedge and the anchor hole must to match, make in the tension together to work, force evenly.

Pre-stressing tendon can be selected from 1 to 55 tendons per design requirements. The tensile force can be controlled within 0 - 11000 KN. Our company can design and produce anchorages of any specifications in accordance with demands of customers. Wide applications it is adaptable for strands with diameters from  $\Phi 9.5\text{mm}$  to  $\Phi 21.6\text{mm}$  ,with standard strength of 2000Mpa or lower. With Compacted structure ,easy operation , safety and laborsaving , high anchoring efficiency and reliable anchorage. Which is widely used for different projects ,such as road and railway bridge, large scale industrial factory, high rise building,Hydroelectric dam , geotechnical engineering, etc.

Production Process

#### PRODUCT DESCRIPTION

# ROUND ANCHOR SYSTEM



Type	Anchor Head $\phi E \times L$	Anchor Spacer $\phi A \times B \times \phi C$	Spiral Reinforcement $\phi G \times \phi H \times I \times N$	Bellows Inner Diameter $\phi D$
M15-2	83×46	130×110×110	120×6.5×40×4	45
M15-3	87×46	130×110×110	120×6.5×50×4	50
M15-4	96×46	145×120×121.5	130×8×50×4	55
M15-5	105×46	160×130×129	130×8×50×4	55
M15-6	117×46	168×150×148	150×10×50×4	70
M15-7	125×50	180×150×149	150×10×50×4	70
M15-8	135×50	195×160×159	160×12×50×4	80
M15-9	145×52	208×160×169	160×12×50×4	80
M15-10	157×55	220×180×185	180×12×50×4	90
M15-11	157×55	225×190×185	180×12×50×4	90
M15-12	165×58	235×190×194	190×12×50×5	90
M15-13	166×60	235×190×194	190×12×50×5	90
M15-14	177×62	235×215×210	210×12×60×5	90
M15-15	177×64	235×215×210	210×12×60×5	90
M15-16	187×66	245×235×220	220×14×60×5	90
M15-17	187×66	245×235×220	220×14×60×5	90
M15-18	196×70	265×235×235	230×14×60×5	100
M15-19	196×70	260×235×235	230×14×60×5	100

Production Process

□ About Us

Sunrise Foundry is a professional Metal Foundry, located in Ningbo. We have been producing Gray Iron, Ductile Iron Castings and any other precision castings for more than 25 years.

We are dedicated to meet different requirements of various customers across the world, products are mainly involved Agricultural and Construction Machinery, Hydraulic, Mining industry, Municipal Products, some steel and stainless steel castings for Pumps and Valves, Pipe Fittings, etc.

Please feel free to contact us if you have any requests.

#### Quality Control



CMM



Tensile Test Machine



#### FAQ

A) How could I get a sample? Before we received the first order, please afford the sample cost and express fee. We will return the sample cost back to you within your first order.

B) Whether you could make our brand on your products? Yes. We can print your Logo on both the products and the packages if you can meet our MOQ.

C) Whether you could make your products by our color? Yes, The color of products can be customized if you can meet our MOQ.



Sunrise Foundry CO.,LTD

+86-15067447509

sales@greycastironcasting.com

greycastironcasting.com