



Prestressed Post-Tensioning Single Hole Anchorage for 12.7 15.24 Strand

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: NC5742
- Certification: ISO9001,CE,SGS
- Model Number: 5742
- Minimum Order Quantity: 100
- Price: Can talk
- Packaging Details: Wooden Case
- Delivery Time: 30 days
- Payment Terms: T/T, L/C
- Supply Ability: 60,000 pcs monthly




Product Specification

- Material: Steel 40Cr
- Process: Machining
- Diameter: 12.7 Mm, 15.24mm
- Application: Construction
- Wedge Type: 2 Or 3 Pcs
- OEM: Available



More Images

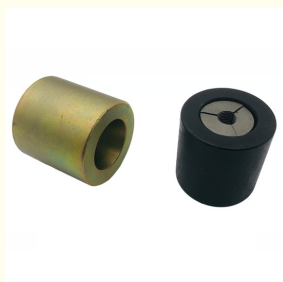


Product Description

Prestressed Post-Tensioning Single Hole Anchorage for 12.7 15.24 Strand

Product Details

Anchorage refers to the permanent anchoring device used in prestressed concrete. It is an anchoring tool used in post-tensioned structures or components to maintain the tensile force of the prestressed tendons and transfer it to the interior of the concrete. It is also called prestressed anchors.

Barrel raw material	40Cr
Wedge raw material	20CrMnTi ; 20CrMn5
Anchor hardness(HRB)	25-35
Wedge surface hardness	HRA79-84
Wedge core hardness	HR38-46
Carburization layer depth	0.35-0.6MM ; 0.6-0.8MM
Anchor efficiency coefficient	>0.95
With-draw of wedge after stressing	<6MM
Tempered	1-4
Retained Austenite	1-4
Inspection of appearance	Tooth shape without defect ,bad teeth ,Variant

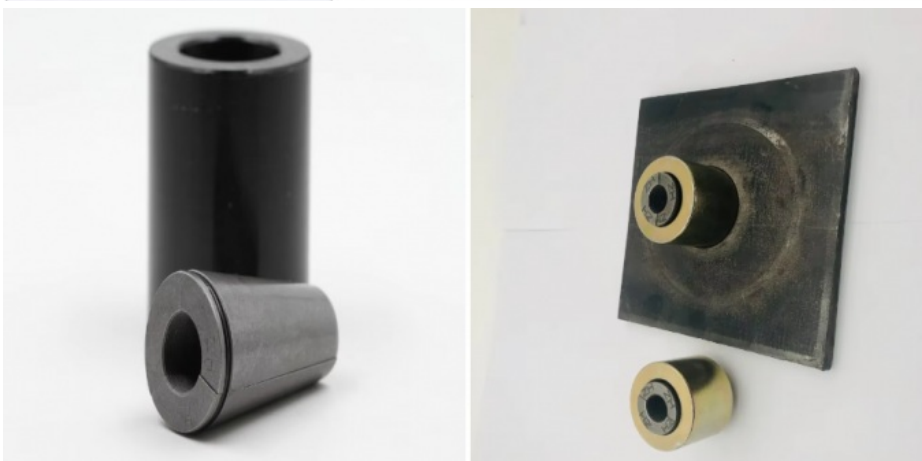

Sunrise Foundry CO.,LTD

+86-15067447509

sales@greycastironcasting.com

greycastironcasting.com