



Post Tensioning Prestressing Mono Anchor for Mining

Our Product Introduction

for more products please visit us on greycastironcasting.com

Basic Information

- Place of Origin: China
- Brand Name: NC9812
- Certification: ISO9001,CE,SGS
- Model Number: 9812
- Minimum Order Quantity: 100 pcs
- Price: Can talk
- Packaging Details: Wooden Case
- Delivery Time: 30 days
- Payment Terms: T/T, L/C
- Supply Ability: 30 days



Product Specification

- Item Name: Mono Anchor
- Application: Mining
- Diameter: 12.70mm, 15.24mm
- Finish: Zinc Plated, Black Oxide, Black
- Material: Steel
- Process: Machining




More Images



Product Description

Post Tensioning Prestressing Mono Anchor for Mining

Product Details

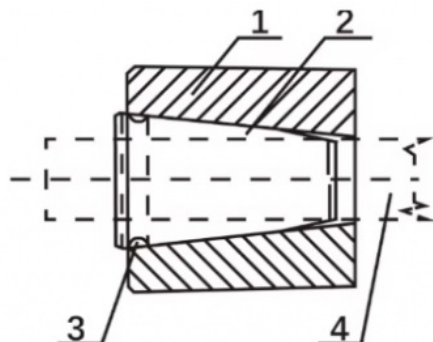

1.Anchor ring 2.Anchor clamp 3.Steel wire loop
4.Anchor cable(steel strand)

Barrel raw material	40Cr
Wedge raw material	20CrMnTi ; 20CrMn5
Hardness of anchor head (HRB)	25-35
Wedge surface hardness	HRA79-84
Wedge core hardness	HR38-46
Carburization Layer Depth	0.35-0.6mm ; 0.6-0.8mm
Anchor Efficiency Coefficient	>0.95
With-draw of wedge after stressing	<6mm
Tempered	1-4
Retained Austenite	1-4
Inspection of Appearance	Tooth shape without defect ,bad teeth ,Variant
Standard	GB/T2301-2004

Size: 12.70mm, 15.24mm, 15.70mm , 17.80mm ,21.60mm

Raw material grade is 40Cr, which is better than 45# .

Heat treatment to control hardness, not extrusion.

it can produced by your drawing or samples also , carve your brand letters .

Application



Workshop



FAQ

Are you a factory or trading company?

A: We are professional manufacturer of fasteners, and we have our own factory that can provide the most favorable prices.

Do you have enough outputs?

A: We have enough stock in warehouses with abundant capital. We offer 24-hour services.

How to ensure that every process's quality?

A: Every process will be checked by our quality inspection department which insures every product's quality.



Sunrise Foundry CO.,LTD



+86-15067447509



sales@greycastironcasting.com



greycastironcasting.com