



## Multi Holes Post Tension Anchor Round Prestressed Strand Coupler Connector

Our Product Introduction

for more products please visit us on [greycastironcasting.com](http://greycastironcasting.com)

### Basic Information

- Place of Origin: Ningbo China
- Brand Name: NC120
- Certification: ISO 9001
- Model Number: 120
- Minimum Order Quantity: 1 pcs
- Packaging Details: Wooden Case
- Delivery Time: 30 days
- Supply Ability: 60,000 pcs per month



### Product Specification

- Type: Adapter
- Application: PC Strand, Bridge Construction
- Material: Steel
- Diameter: 245mm
- Hardness: 20-35HRC
- Strength: 1860MPa
- Highlight: **post tensioning system, post tension accessories**



### More Images



## Product Description

### Multi Holes Post Tension Anchor Round Prestressed Strand Coupler Connector

#### Description

Strand Coupler

1. LQM strand coupler include LQM 15L and LQM 13L periphery hanging connectors. They are mainly suitable for the connection long of dia.0.5" and 0.6" PC strand bundles, and used in the post-tensioning continuous beam structure.
2. LQM strand coupler periphery hanging connectors consist of coupler, wedge, squeezing socket, anchor bearing plate, spiral reinforcements, restraining ring, protective sleeve, metal corrugated duct, and PC tendon etc..
3. This strand coupler performance is better and it is suitable for the connection of various tonnage PC strand bundle.



#### Product Details

Type	Strand No.	Anchor Fitting A×B×ΦC	Corrugated Pipe Inner Dia	ΦE×F Anchor Ring	Anchor Fitting		Tensioning Jack Type
					Holes Distance	Holes Dia.	
YJM15-1	1	80×80×Φ12		Φ45×45	Φ70×46		YDC260Q (YDC240Q)
YJM15-2	2	130×85×Φ71.5	Φ50	Φ88×48	Φ100×88	M12	
YJM15-3	3	130×85×Φ71.5	Φ50	Φ88×50	Φ100×88	M12	YCW100B
YJM15-4	4	140×90×Φ80	Φ55	Φ102×50	Φ110×100	M12	YCW100B
YJM15-5	5	150×110×Φ89	Φ55	Φ108×50	Φ114×120	M12	YCW100B (YCW150B)

YJM15-6	6	180×120×Φ102	Φ70	Φ126×50	Φ170 × Φ41 2 × 5 0	140	M12	YCW100B
YJM15-7	7	180×120×Φ102	Φ70	Φ126×50	Φ170 × Φ41 2 × 5 0	140	M12	YCW150B (YCW250B)
YJM15-8	8	200×140×Φ118	Φ80	Φ136×50	Φ180 × Φ51 4 × 5 0	170	M12	YCW250B
YJM15-9	9	210×160×Φ118	Φ80	Φ147×50	Φ200 × Φ51 4 × 5 0	170	M12	YCW250B
YJM15-10	10	240×190×Φ136	Φ90	Φ158×50	Φ230 × Φ51 4 × 6 0	190	M12	YCW250B
YJM15-11	11	240×190×Φ136	Φ90	Φ158×50	Φ230 × Φ51 4 × 6 0	190	M12	YCW250B
YJM15-12	12	240×190×Φ136	Φ90	Φ166×50	Φ230 × Φ51 4 × 6 0	190	M12	YCW250B
YJM15-13	13	240×190×Φ136	Φ90	Φ166×56	Φ230 × Φ51 4 × 6 0	190	M12	YCW350B

YJM15-14	14	240×200×Φ148	Φ90	Φ177×60	Φ230 × Φ516 × Φ660	190	M12	YCW350B
YJM15-15	15	240×200×Φ153	Φ90	Φ178×60	Φ230 × Φ514 × Φ660	190	M12	YCW350B
YJM15-16	16	260×220×Φ159	Φ90	Φ195×60	Φ230 × Φ516 × Φ660	200	M12	YCW350B (YCW400B)
YJM15-17	17	260×220×Φ159	Φ90	Φ195×65	Φ230 × Φ516 × Φ660	200	M12	YCW350B (YCW400B)
YJM15-18	18	270×220×Φ176	Φ100	Φ205×65	Φ230 × Φ516 × Φ660	200	M12	YCW400B
YJM15-19	19	270×220×Φ176	Φ100	Φ205×65	Φ250 × Φ616 × Φ660	200	M12	YCW400B (YCW500A)
YJM15-21/22	21/22	320×260×Φ210	Φ120	Φ235×72	Φ280 × Φ618 × Φ700	240	M12	YCW500A
YJM15-25/26/27	25/26/27	350×295×Φ222	Φ130	Φ256×100	Φ300 × Φ622 × Φ720	260	M12	YCW650A

YJM15-30/31	30/31	390×346×Φ222	Φ130	Φ275×100	Φ7290	M12	YCW650A
YJM15-34/37	34/37	465×390×Φ246	Φ140	Φ305×120	Φ8350	M12	YCW900A
YJM15-43/44	43/44	500×450×Φ286	Φ160	Φ336×130	Φ8376	M12	YCW900A
YJM15-54/55	54/55	540×510×Φ295	Φ160	Φ345×160	Φ8400	M12	YCW1200A

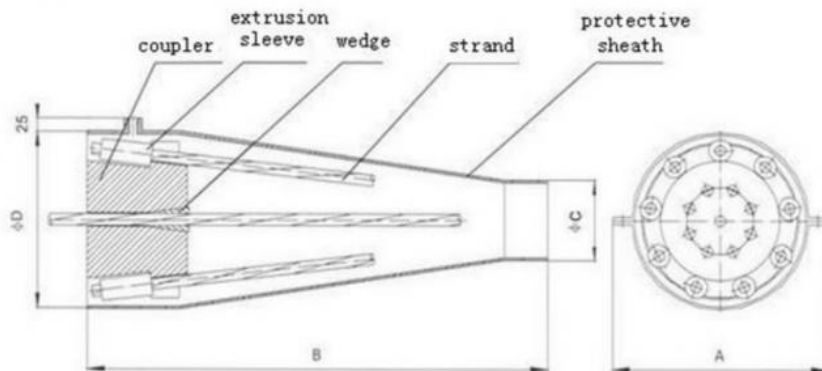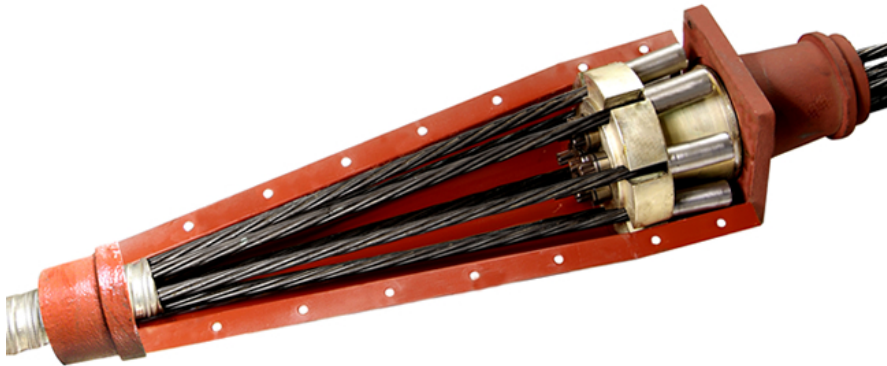



**Package**

We will use standard export package with wooden case. We can also packed as per customers' requirements.


**Payment**

We accept T/T, L/C, 40% as deposit and balance payment before delivery.



 +86-15067447509

 [sales@greycastironcasting.com](mailto:sales@greycastironcasting.com)

 [greycastironcasting.com](http://greycastironcasting.com)